


# GF333V2

## Three Phase Multifunction Reference Standard Meter

GF333V2 meter is a reference standard with the characteristics of wide-range, multifunction and high-precision. It has accuracy class of 0.02. By adopting techniques of DSP, embedded system and automatic temperature balancing and other compensation, it has not only advantages of light weight, small size, high precision, high performance, powerful function, original interface, ease-to-use, but also work stability.

The product can be widely used in fields of electric energy measuring, electric energy laboratories and other relevant industry, not only in laboratories but also at the industrial field.

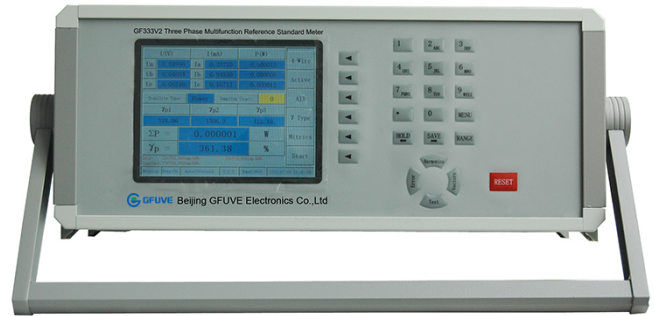

### Features

1. High accuracy class up to 0.02%
2. High stability, high reliability
3. Measuring 2nd~51st harmonics
4. Metal structure, strong and reliable
5. Waveform display function
6. Vector diagram function
7. Energy accumulating function
8. Suit for testing in the lab
9. As a three phase reference standard

### Parameters

Electrical parameters	
Accuracy class	0.02%, 0.05%
Power supply	220V±10% or 110V±10%, 50/60Hz
Power consumption	30VA
Test Voltage	
Range	40-560V
Error	±0.02% (40V-560V) ±0.05% (5V-40V)
Harmonic	2 <sup>nd</sup> -51 <sup>st</sup>

Архангельск (8182)63-90-72  
 Астана (7172)727-132  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89  
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Краснодар (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Липецк (4742)52-20-81  
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (383)227-86-73  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Орел (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16  
 Россия (495)268-04-70

Пермь (342)205-81-47  
 Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13  
 Казахстан (772)734-952-31

Сургут (3462)77-98-35  
 Тверь (4822)63-31-35  
 Томск (3822)98-41-53  
 Тула (4872)74-02-29  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Ярославль (4852)69-52-93

**Electrical parameters - continued**
**Test current**

Range (direct connection)	10mA-120A
Error (direct connection)	±0.02% (100mA-120A) ±0.05% (10mA-100mA)
Harmonic	2 <sup>nd</sup> -51 <sup>st</sup>

**Power measure error**

Active power(direct connection)	±0.02% (0.1A-120A) ±0.05% (0.02A-0.1A)
Reactive power(direct connection)	±0.05% (0.1A-120A)

**Energy measure error**

Active energy (direct connection)	±0.02% (0.1A-120A) ±0.05% (0.02A-0.1A)
Reactive energy (direct connection)	±0.05% (0.1A-120A)

**Phase angle**

Range	0°-360°
Error	±0.02°

**Frequency**

Range	40-70Hz
-------	---------

**Pulse output**

Energy constant	1-9999999
Pulse ratio	1:1
Output level	5V

**Pulse input**

Input channel	1
Input level	5-24V
Input frequency	Max. 2MHz

**Display**

Resolution	6.4" inch 640x480 pixel TFT
Communication port	RS232 , USB

**Mechanical parameters**

Dimensions (W×H×D) (mm)	355×185×145
Weight (kg)	7.5

**Environmental conditions**

Ambient temperature	10°C to 40°C
Relative humidity	20%-85%

Архангельск (8182)63-90-72  
 Астана (7172)727-132  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89  
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Краснодар (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Липецк (4742)52-20-81  
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (3843)20-46-81  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Орел (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16  
 Россия (495)268-04-70

Пермь (342)205-81-47  
 Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13  
 Казахстан (772)734-952-31

Сургут (3462)77-98-35  
 Тверь (4822)63-31-35  
 Томск (3822)98-41-53  
 Тула (4872)74-02-29  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Ярославль (4852)69-52-93