


FUD-F

Multiple Range Variable Frequency Transducer

As the leading product in market, FUD-F multiple range variable frequency transducer adopts SCM as the core with the latest algorithm to achieve precise measurement of frequency in AC circuit.

Features

1. Frequency transducer
2. Multiple range frequency transducers
3. Adopt the SCM as the core technology
4. With the latest algorithm
5. Accuracy class can reach 0.1%

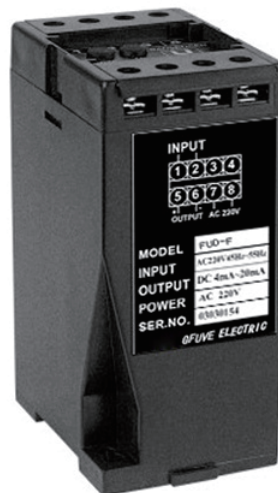

Parameters

Technical Index	
Standard	GB/T 13850-1998, IEC688:1992
Accuracy	0.1%, 0.2%
Consumption	≤3VA
Insulation voltage	AC 2kV/min.1mA (Between input-output/power)
Response time	≤300ms
Input range	AC100-400V(option), 45Hz-60Hz
Absorbed power	≤0.22VA/220V, ≤0.10VA/100V
Overload	2 times continuous
Load resistance	Current output: RL ≤650Ω Voltage output: RL ≥2kΩ
Working environment	Temperature: -10 to +50°C RH: 20-90%, without condensation
Storage conditions	Temperature: -40 to +70°C RH: 20-95%, without condensation
Installation	35mm DIN sliding-way or M4 screws
Dimension	55mm x 75mm x 120mm

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Россия (495)268-04-70

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Казахстан (772)734-952-31

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Model Description

FUD-Type-Input-Power Supply-Frequency range-Output

AC input	V1: 100V±40%, V2: 220V±40%, V3: 270V±40%, V4: 400V±40%, V5: User defined.
Power supply	P1: AC110V±10%, P2: AC220V±15%
Frequency range	F1: 45-55Hz, F2: 48-52Hz, F3: 40-60Hz, Fn: User defined.
DC output	O1: 0-5V, O2: 1-5V, O3: 0-20mA, O4: 4-20mA.

Example 1: FUD-F-V2-P2-F1-O4

FUD series frequency transducer	Input voltage: AC220±40% Power: AC220V±15% F range: 45-55Hz Output: DC4-20mA
---------------------------------	---

Please check the type, input range, output range and power supply when your order the product.

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Россия (495)268-04-70

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Казахстан (772)734-952-31

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

<https://gfuve.nt-rt.ru/> || gfv@nt-rt.ru